



750 WALL MOUNT

ACTIVE AIR PURIFIER WITH ARC® TECHNOLOGY

Features & Specifications


- Active Air Purification; No Ductwork Required
- Easily Mounts to Wall
- 24/7 Odor and Particulate Reduction
- Replaceable ARC cell and MERV filter

Technology

- Active Radiant Catalysis (ARC®) - Our Proprietary Form of Photocatalytic Oxidation

Applications

- Workshops
- Day Care Facilities
- Veterinary Clinics
- Offices
- Nursing Homes
- Motor Coaches
- Schools
- Nail Salons
- Public Restrooms

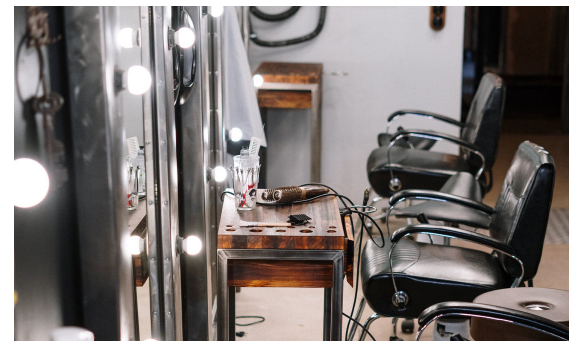

Benefits of pureAir 750 WALL MOUNT



Provides Continuous Purification



Reduces Odors



Wide List of Applications



Sized for Multiple Locations



Mounts to Save Space

Active Oxidation Improves Air Quality



Providing continuous air purification, this permanently mounted unit is perfect for spaces without HVAC duct access. pureAir 750 Wall Mount features the same active air purification technology developed and used by NASA.



Active Radiant Catalysis (ARC®), our proprietary photocatalytic oxidation (PCO) technology uses energy to activate a catalyst, turning moisture into products that continuously clean your space.



AOPs are propelled out into your space to hunt down particulates, even the very small ones. At the same time, negative ions go out and charge particles such as dust, pollen and pet dander, causing them to drop out of your breathing space.



With a reactive surface area more than 16x greater than the competition, pureAir 750 Wall Mount continuously purifies your space. The result is the reduction of allergens from pets, pollen, and smoke, as well as odors from mold, mildew, and more.

Features & Specifications

- Dimensions: 10.25" H (260mm) x 9.25" W (234mm) x 3.00" D (88.9mm)
- Weight: 3lbs (1.36kg)
- Materials: Powder Coated Aluminum
- Warranty: 2 Year Manufacturer's Warranty

To Use This Product Correctly

- Read All Instructions Carefully in User Manual Before Operating Purifier.

Power

- Input Voltage: 24VDC
- Operating Voltage: 24VDC
- Operating Wattage: 12.9W
- Operating Amperage: .53A

Performance

- Airflow: 70 CFM
- Ozone Output (optional): < 0.05 ppm
- Coverage: 750 ft²